




Type : T Cores



规格 Type	尺寸Dimensions (mm)			尺寸Dimensions (mm)			Cl	le	Ae	Ve	wt/pcs (g)
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15	mm <sup>-1</sup>	mm	mm <sup>2</sup>	mm <sup>3</sup>	
T-2.03-1-0.76	2.03	1.00	0.76	2.03	1.00	0.76	11.676	4.383	0.375	1.645	0.008
T-2.03-1.27-0.76	2.03	1.27	0.76	2.03	1.27	0.76	17.63	4.998	0.284	1.5	0.007
T-2.54-1.27-0.76	2.54	1.27	0.76	2.54	1.27	0.76	11.896	5.531	0.465	2.572	0.012
T-2.54-1.27-0.99	2.54	1.27	0.99	2.54	1.27	0.99	9.151	5.531	0.604	3.343	0.02
T-2.54-1.27-1.27	2.54	1.27	1.27	2.54	1.27	1.27	7.138	5.531	0.775	4.286	0.02
T-2.54-1.27-2.54	2.54	1.27	2.54	2.54	1.27	2.54	3.569	5.531	1.55	8.572	0.05
T-2.54-1.32-1.27	2.54	1.32	1.27	2.54	1.32	1.27	7.558	5.651	0.747	4.224	0.02
T-2.54-1.35-1.27	2.54	1.35	1.27	2.54	1.35	1.27	7.827	5.722	0.73	4.182	0.02
T-2.54-1.4-1.27	2.54	1.40	1.27	2.54	1.40	1.27	8.305	5.838	0.702	4.103	0.02
T-2.59-1.37-1.27	2.59	1.37	1.27	2.59	1.37	1.27	7.768	5.819	0.749	4.358	0.02
T-2.54-1.5-0.99	2.54	1.50	0.99	2.54	1.50	0.99	12.021	6.059	0.504	3.054	0.02
T-2.7-1.32-0.76	2.70	1.32	0.76	2.70	1.32	0.76	11.552	5.806	0.503	2.918	0.0157
T-2.7-1.32-2.06	2.70	1.32	2.06	2.70	1.32	2.06	4.262	5.806	1.362	7.909	0.0426
T-2.9-1.6-1.27	2.90	1.60	1.27	2.90	1.60	1.27	8.319	6.668	0.801	5.345	0.03
T-2.92-1.63-1.78	2.92	1.63	1.78	2.92	1.63	1.78	6.03	6.749	1.119	7.553	0.04
T-2.92-1.63-2.41	2.92	1.63	2.41	2.92	1.63	2.41	4.443	6.749	1.519	10.251	0.05
T-2.92-1.68-2.06	2.92	1.68	2.06	2.92	1.68	2.06	5.518	6.87	1.245	8.555	0.0461
T-2.95-1.6-1.78	2.95	1.60	1.78	2.95	1.60	1.78	5.77	6.72	1.165	7.827	0.0396
T-3.05-1.27-0.76	3.05	1.27	0.76	3.05	1.27	0.76	9.419	5.988	0.636	3.807	0.02
T-3.05-1.27-1.27	3.05	1.27	1.27	3.05	1.27	1.27	5.651	5.988	1.06	6.345	0.04
T-3.05-1.27-1.5	3.05	1.27	1.50	3.05	1.27	1.50	4.781	0.599	1.253	7.494	0.05
T-3.05-1.27-2.54	3.05	1.27	2.54	3.05	1.27	2.54	2.826	5.988	2.119	12.69	0.07

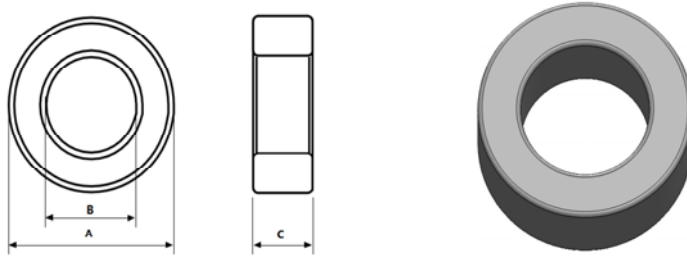

湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)			尺寸Dimensions (mm)			C1	le	Ae	Ve	wt/pcs
	A	B	C	A	B	C	mm <sup>-1</sup>	mm	mm <sup>2</sup>	mm <sup>3</sup>	(g)
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-3.05-1.37-0.76	3.05	1.37	0.76	3.05	1.37	0.76	10.33	6.254	0.605	3.786	0.02
T-3.05-1.52-2.06	3.05	1.52	2.06	3.05	1.52	2.06	4.406	6.637	1.506	10	0.05
T-3.05-1.65-1.65	3.05	1.65	1.65	3.05	1.65	1.65	6.207	6.938	1.118	7.755	0.04
T-3.05-1.65-2.39	3.05	1.65	2.39	3.05	1.65	2.39	4.292	6.938	1.616	11.215	0.06
T-3.05-1.78-1.5	3.05	1.78	1.50	3.05	1.78	1.50	7.778	7.232	0.93	6.725	0.04
T-3.05-1.78-1.52	3.05	1.78	1.52	3.05	1.78	1.52	7.649	7.226	0.945	6.826	0.04
T-3.05-1.78-1.78	3.05	1.78	1.78	3.05	1.78	1.78	6.554	7.232	1.103	7.979	0.0407
T-3.05-1.78-2.03	3.05	1.78	2.03	3.05	1.78	2.03	5.737	7.226	1.26	9.101	0.05
T-3.05-1.88-2.06	3.05	1.68	2.06	3.05	1.68	2.06	6.304	7.45	1.185	8.805	0.05
T-3.2-1.78-2.06	3.05	1.78	2.06	3.05	1.78	2.06	5.2	7.391	1.421	10.505	0.054
T-3.3-1.27-1.27	3.20	1.27	1.27	3.20	1.27	1.27	5.178	6.193	1.196	7.412	0.05
T-3.3-1.27-1.53	3.30	1.27	1.53	3.30	1.27	1.53	4.3	6.193	1.44	8.929	0.06
T-3.3-2-2	3.30	2.00	2.00	3.30	2.00	2.00	6.273	7.987	1.273	10.169	0.0514
T-3.43-1.78-0.86	3.43	1.78	0.86	3.43	1.78	0.86	11.078	7.619	0.688	5.241	0.03
T-3.43-1.78-1.52	3.43	1.78	1.52	3.43	1.78	1.52	6.277	7.619	1.214	9.248	0.05
T-3.43-1.78-1.78	3.43	1.78	1.78	3.43	1.78	1.78	5.381	7.619	1.416	10.79	0.06
T-3.43-1.78-2.06	3.43	1.78	2.06	3.43	1.78	2.06	4.65	7.619	1.639	12.485	0.07
T-3.43-1.78-2.54	3.43	1.78	2.54	3.43	1.78	2.54	3.766	7.619	2.023	15.414	0.08
T-3.43-1.52-0.76	3.43	1.52	0.76	3.43	1.52	0.76	10.168	6.989	0.687	4.803	0.03
T-3.5-1.78-0.76	3.50	1.78	0.76	3.50	1.78	0.76	12.22	7.694	0.629	4.842	0.03
T-3.68-1.65-2.54	3.68	1.65	2.54	3.68	1.65	2.54	3.083	7.543	2.447	18.454	0.11
T-3.9-1.7-2.07	3.90	1.70	2.07	3.90	1.70	2.07	3.656	7.861	2.151	16.9	0.09
T-3.94-1.68-1.37	3.94	1.68	1.37	3.94	1.68	1.37	5.366	7.831	1.459	11.429	0.07
T-3.94-1.78-1.27	3.94	1.78	1.27	3.94	1.78	1.27	6.224	8.097	1.301	10.534	0.06
T-3.94-1.78-1.5	3.94	1.78	1.52	3.94	1.78	1.52	5.272	8.105	1.537	12.46	0.07
T-3.94-1.78-1.52	3.94	1.78	1.52	3.94	1.78	1.52	5.186	8.097	1.561	12.641	0.07
T-3.94-1.78-1.78	3.94	1.78	1.78	3.94	1.78	1.78	4.445	8.097	1.821	14.748	0.08



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)			尺寸Dimensions (mm)			C1	le	Ae	Ve	wt/pcs
	A	B	C	A	B	C	mm <sup>-1</sup>	mm	mm <sup>2</sup>	mm <sup>3</sup>	(g)
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-3.94-1.78-2.54	3.94	1.78	2.54	3.94	1.78	2.54	3.112	8.097	2.602	21.068	0.12
T-3.94-2.24-1.27	3.94	2.24	1.27	3.94	2.24	1.27	8.74	9.196	1.052	9.677	0.05
T-3.94-2.24-1.65	3.94	2.24	1.65	3.94	2.24	1.65	6.723	9.196	1.368	12.58	0.07
T-3.94-2.24-2.01	3.94	2.24	2.01	3.94	2.24	2.01	5.531	9.196	1.663	15.289	0.08
T-3.94-2.24-2.54	3.94	2.24	2.54	3.94	2.24	2.54	4.37	9.196	2.104	19.353	0.1
T-3.99-2.01-0.99	3.99	2.01	0.99	3.99	2.01	0.99	9.235	8.715	0.944	8.223	0.05
T-4.83-2.29-1.27	4.83	2.29	1.27	4.83	2.29	1.27	6.621	10.196	1.54	15.701	0.09
T-4.83-2.29-2.54	4.83	2.29	2.54	4.83	2.29	2.54	3.311	10.196	3.08	31.401	0.18
T-4.95-1.57-0.76	4.95	1.57	0.76	4.95	1.57	0.76	7.196	8.312	1.155	9.601	0.06
T-5.84-3.05-1.52	5.84	3.05	1.52	5.84	3.05	1.52	6.337	13.026	2.055	26.775	0.14
T-5.84-3.05-2.54	5.84	3.05	2.54	5.84	3.05	2.54	3.802	13.026	3.426	44.624	0.24
T-5.84-3.05-3.05	5.84	3.05	3.05	5.84	3.05	3.05	3.169	13.026	4.111	53.549	0.29
T-5.84-3.05-3.18	5.84	3.05	3.18	5.84	3.05	3.18	3.042	13.026	4.282	55.78	0.3
T-5.84-3.05-4.29	5.84	3.05	4.29	5.84	3.05	4.29	2.25	13.026	5.79	75.415	0.41
T-6-3-3	6.00	3.00	3.00	6.00	3.00	3.00	3.022	13.066	4.324	56.496	0.3
T-6.05-2.95-3.18	6.05	2.95	3.18	6.05	2.95	3.18	2.754	12.978	4.713	61.163	0.34



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						C1	Ie	Ae	Ve	wt/pcs
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-6.5-3.5-2.3	6.50 ± 0.30	3.50 ± 0.25	2.30 ± 0.20	6.50 ± 0.30	3.50 ± 0.25	2.30 ± 0.20	4.41	14.75	3.34	49.29	0.27
T-6.95-4-2	6.95 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	6.95 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	5.69	16.36	2.88	47.04	0.25
T-7-4-2	7.00 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	7.00 ± 0.20	4.00 ± 0.15	2.00 ± 0.15	5.61	16.41	2.92	47.96	0.25
T-7.1-4.4-2.7	7.10 ± 0.30	4.40 ± 0.30	2.70 ± 0.30	7.10 ± 0.30	4.40 ± 0.30	2.70 ± 0.30	4.86	17.39	3.58	62.20	0.31
T-7.62-3.18-4.8	7.62 ± 0.15	3.18 ± 0.15	4.80 ± 0.15	7.62 ± 0.15	3.18 ± 0.15	4.80 ± 0.15	1.5	14.98	10	149.88	0.89
T-8-4-4	8.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.30	8.00 ± 0.30	4.00 ± 0.20	4.00 ± 0.30	2.27	17.42	7.69	133.92	0.76
T-8-4.5-4	8.00 ± 0.30	4.50 ± 0.20	4.00 ± 0.30	8.00 ± 0.30	4.50 ± 0.20	4.00 ± 0.30	2.73	18.59	6.81	126.61	0.65
T-8.15-4.3-4.05	8.15 ± 0.30	4.30 ± 0.30	4.05 ± 0.30	8.15 ± 0.30	4.30 ± 0.30	4.05 ± 0.30	2.43	18.28	7.54	137.79	0.75
T-8.35-3.33-4.18	8.35 ± 0.30	3.33 ± 0.20	4.18 ± 0.20	8.35 ± 0.30	3.33 ± 0.20	4.18 ± 0.20	1.64	16.00	9.78	156.50	0.93
T-8.7-5.2-2.3	8.70 ± 0.15	5.20 ± 0.15	2.30 ± 0.15	8.70 ± 0.15	5.20 ± 0.15	2.30 ± 0.15	5.31	20.90	3.94	82.29	0.42
T-8.89-3.81-4.83	8.89 ± 0.15	3.81 ± 0.15	4.83 ± 0.15	8.89 ± 0.15	3.81 ± 0.15	4.83 ± 0.15	1.54	17.75	11.56	205.16	1.16
T-9-5-3	9.10 ± 0.30	5.10 ± 0.30	3.00 ± 0.30	10.00max	4.20min	3.90max	3.56	20.77	5.83	121.12	0.60
T-9-5-5	9.10 ± 0.30	5.10 ± 0.30	5.00 ± 0.30	10.00max	4.20min	5.90max	2.14	20.77	9.72	201.86	1.00
T-9-5-5.5	9.10 ± 0.30	5.10 ± 0.30	5.50 ± 0.30	10.00max	4.20min	6.40max	1.94	20.77	10.69	222.05	1.09
T-9-5-7	9.10 ± 0.30	5.10 ± 0.30	7.00 ± 0.30	10.00max	4.20min	7.90max	1.53	20.77	13.60	282.61	1.41
T-9-6-3	8.90 ± 0.30	6.00 ± 0.30	3.00 ± 0.30	9.80max	5.10min	3.90max	5.17	22.93	4.44	101.78	0.60
T-9-6-5	8.90 ± 0.30	6.00 ± 0.30	5.00 ± 0.30	9.80max	5.10min	5.90max	3.1	22.93	7.4	169.63	0.86
T-9.5-3-1.7	9.50 ± 0.40	3.00 ± 0.30	1.70 ± 0.20	10.50max	2.10min	2.50max	3.21	15.88	4.95	78.62	0.51
T-9.53-4.75-3.2	9.53 ± 0.25	4.75 ± 0.25	3.20	10.38max	3.90min	3.93max	2.82	20.72	7.35	152.19	0.8
T-9.53-4.75-4.8	9.53 ± 0.25	4.75	4.80	10.38max	4.03min	5.53max	1.88	20.72	11.02	228.28	1.09
T-9.53-4.75-4.9	9.53 ± 0.25	4.75	4.90	10.38max	4.03min	5.63max	1.84	20.72	11.25	233.04	1.26
T-9.53-4.75-6.35	9.53 ± 0.20	4.75 ± 0.20	6.35 ± 0.18	10.33max	3.95min	7.13max	1.42	20.72	14.58	302.00	1.62
T-9.53-5.59-3.2	9.53 ± 0.30	5.59 ± 0.25	3.20	10.43max	4.74min	3.93max	3.68	22.66	6.16	139.51	0.75
T-9.53-5.59-4	9.53 ± 0.30	5.59 ± 0.25	4.00	10.43max	4.74min	4.73max	2.94	22.66	7.70	174.39	0.91
T-9.53-5.59-4.9	9.53 ± 0.30	5.59 ± 0.25	4.90	10.43max	4.74min	5.63max	2.4	22.66	9.43	213.62	1.14
T-9.53-5.59-7.11	9.53 ± 0.30	5.59 ± 0.25	7.11 ± 0.25	10.43max	4.74min	8.01max	1.66	22.66	13.68	309.97	1.61
T-10-5-2.3	10.00 ± 0.20	5.00 ± 0.13	2.30 ± 0.13	10.80max	4.27min	3.03max	3.94	21.78	5.53	120.32	0.66
T-10-5-3	10.00 ± 0.20	5.00 ± 0.13	3.00 ± 0.13	10.80max	4.27min	3.73max	3.02	21.78	7.21	156.93	0.84



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						C1	Ie	Ae	Ve	wt/pcs
	A	B	C	A	B	C					
							mm <sup>-1</sup>	mm	mm <sup>2</sup>	mm <sup>3</sup>	(g)

	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15	mm	mm	mm	mm	(g)
T-10-5-5	10.00 ± 0.20	5.00 ± 0.13	5.00 ± 0.13	10.80max	4.27min	5.73max	1.81	21.78	12.01	261.56	1.41
T-10-6-2.78	10.10 ± 0.30	6.10 ± 0.30	2.78 ± 0.30	11.00max	5.20min	3.68max	4.42	24.07	5.44	130.97	0.67
T-10-6-4	10.10 ± 0.30	6.10 ± 0.30	4.00 ± 0.30	11.00max	5.20min	4.90max	3.08	24.07	7.83	188.44	0.98
T-10-6-5	10.10 ± 0.30	6.10 ± 0.30	5.00 ± 0.30	11.00max	5.20min	5.90max	2.46	24.07	9.79	235.55	1.25
T-10-6-6	10.10 ± 0.30	6.10 ± 0.30	6.00 ± 0.30	11.00max	5.20min	6.90max	2.05	24.07	11.74	282.66	1.48
T-10.6-5.2-4.4	10.60 ± 0.30	5.20 ± 0.30	4.40 ± 0.20	11.50max	4.30min	5.20max	2.01	22.84	11.39	260.14	1.41
T-11.5-7.5-3.6	11.50 ± 0.30	7.50 ± 0.30	3.60 ± 0.30	112.40max	6.60min	4.50max	4.08	28.96	7.09	205.33	1.08
T-12-6-4	12.00 ± 0.40	6.00 ± 0.30	4.00 ± 0.30	13.00max	5.10min	4.90max	2.27	26.13	11.53	301.31	1.50
T-12.4-7.8-3.75	12.40 ± 0.40	7.80 ± 0.30	3.75 ± 0.30	13.40max	6.90min	4.65max	3.61	30.62	8.47	259.43	1.34
T-12.5-7.5-5	12.50 ± 0.30	7.50 ± 0.30	5.00 ± 0.30	13.40max	6.60min	5.90max	2.46	30.09	12.23	368.05	1.93
T-12.5-7.5-6.45	12.50 ± 0.30	7.50 ± 0.30	6.45 ± 0.30	13.40max	6.60min	7.35max	1.91	30.09	15.78	474.79	2.45
T-12.7-5.16-6.35	12.70 ± 0.40	5.16 ± 0.30	6.35 ± 0.30	13.70max	4.26min	7.25max	1.10	24.59	22.38	550.49	3.21
T-12.7-7.14-4.78	12.70 ± 0.40	7.14 ± 0.30	4.78 ± 0.30	13.70max	6.24min	5.68max	2.28	29.51	12.93	381.43	2
T-12.7-7.14-4.78	12.70 ± 0.40	7.14 ± 0.30	4.78 ± 0.30	13.70max	6.24min	5.68max	2.28	29.51	12.93	381.43	2.00
T-12.7-7.92-4.7	12.70 ± 0.40	7.92 ± 0.30	4.70 ± 0.30	13.70max	7.02min	5.60max	2.83	31.22	11.03	344.21	1.61
T-12.7-7.92-4.9	12.70 ± 0.40	7.92 ± 0.30	4.90 ± 0.30	13.70max	7.02min	5.80max	2.72	31.22	11.50	358.86	1.70
T-12.7-7.92-5.2	12.70 ± 0.40	7.92 ± 0.30	5.20 ± 0.30	13.70max	7.02min	6.10max	2.56	31.22	12.2	380.83	1.8
T-12.7-7.92-6.35	12.70 ± 0.40	7.92 ± 0.30	6.35 ± 0.30	13.70max	7.02min	7.25max	2.10	31.22	14.90	465.05	2.33
T-12.7-7.92-7	12.70 ± 0.40	7.92 ± 0.30	7.00 ± 0.30	13.70max	7.02min	7.90max	1.9	31.22	16.42	512.66	2.65
T-12.7-8.02-6.35	12.70 ± 0.25	8.02 ± 0.25	6.35 ± 0.15	13.50max	7.17min	7.10max	2.15	31.43	14.60	458.86	2.39
T-12.7-8.12-5.08	12.70 ± 0.40	8.12 ± 0.30	5.08 ± 0.30	13.70max	7.22min	5.98max	2.77	31.64	11.44	361.98	1.82
T-12.85-7.35-5	12.85 ± 0.40	7.35 ± 0.30	5.00 ± 0.30	13.85max	6.45min	5.90max	2.25	30.14	13.40	403.78	2.14
T-13.21-7.37-3.96	13.21 ± 0.40	7.37 ± 0.30	3.96 ± 0.30	14.21max	6.47min	4.86max	2.72	30.56	11.24	343.54	1.81
T-13.3-7.1-12.7	13.30 ± 0.30	7.10 ± 0.30	12.70 ± 0.30	14.20max	6.20min	13.60max	0.79	30.03	38.10	1144.33	6.17
T-13.3-8.3-5	13.30 ± 0.30	8.30 ± 0.30	5.00 ± 0.30	14.20max	7.40min	5.90max	2.67	32.7	12.27	401.31	2.09
T-14-7-7	14.00 ± 0.40	7.00 ± 0.30	7.00 ± 0.30	15.00max	6.10min	7.90max	1.29	30.49	23.54	717.71	3.88
T-14-7.5-7	14.00 ± 0.40	7.50 ± 0.30	7.00 ± 0.30	15.00max	6.60min	7.90max	1.44	31.68	22.03	697.66	3.69



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						C1	Ie	Ae	Ve	wt/pcs
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-14-8-4	14.00 ± 0.40	8.00 ± 0.30	4.00 ± 0.30	15.00max	7.10min	4.90max	2.81	32.82	11.69	383.69	1.97

T-14-8-7	14.00 ± 0.40	8.00 ± 0.30	7.00 ± 0.30	15.00max	7.10min	7.90max	1.6	32.82	20.46	671.46	3.45
T-14-8-7	14.00 ± 0.40	8.00 ± 0.30	7.00 ± 0.30	15.00max	7.10min	7.90max	1.60	32.82	20.46	671.46	3.45
T-14-8-9	14.00 ± 0.40	8.00 ± 0.30	9.00 ± 0.30	15.00max	7.10min	9.90max	1.25	32.82	26.31	863.31	4.48
T-14-8.4-4	14.00 ± 0.40	8.40 ± 0.30	4.00 ± 0.30	15.00max	7.50min	4.90max	3.08	33.70	10.96	369.35	1.97
T-14-8.4-12	14.00 ± 0.40	8.40 ± 0.30	12.00 ± 0.30	15.00max	7.50min	12.90max	1.03	33.7	32.88	1108.05	5.63
T-14-9-5	19.00 ± 0.30	13.00 ± 0.30	6.00 ± 0.20	19.90max	12.10min	6.80max	2.76	49.08	17.79	872.90	4.39
T-14.3-9.7-6.3	19.30 ± 0.40	10.20 ± 0.30	10.40 ± 0.30	20.30max	9.30min	11.30max	0.95	43.34	45.75	1982.76	10.55
T-15.7-10.2-6.8	15.70 ± 0.40	10.20 ± 0.40	6.80 ± 0.30	16.70max	9.20min	7.60max	2.14	39.45	18.41	726.37	3.70
T-15.88-8.89-4.7	15.88 ± 0.40	8.89 ± 0.30	4.70 ± 0.30	16.88max	7.99min	5.60max	2.3	36.81	15.97	587.97	3.17
T-16-7-9	16.00 ± 0.30	7.00 ± 0.20	9.00 ± 0.20	16.90max	6.20min	9.80max	0.84	32.32	38.27	1236.87	7.11
T-16-8-8	16.00 ± 0.30	8.00 ± 0.30	8.00 ± 0.30	16.90max	7.10min	8.90max	1.13	34.84	30.75	1071.34	5.83
T-16-9-5	16.00 ± 0.40	9.50 ± 0.40	5.00 ± 0.30	17.00max	8.50min	5.90max	2.18	37.18	17.03	633.06	3.19
T-16-9-8	16.00 ± 0.40	9.50 ± 0.40	8.00 ± 0.30	17.00max	8.50min	8.90max	1.37	37.18	27.24	1012.9	4.94
T-16-9.6-6.1	16.00 ± 0.30	9.60 ± 0.30	6.10 ± 0.30	16.90max	8.70min	7.00max	2.02	38.52	19.10	735.68	3.64
T-16-10-5	16.00 ± 0.30	10.00 ± 0.30	5.00 ± 0.30	16.90max	9.10min	5.90max	2.67	39.37	14.73	579.87	2.96
T-16-12-7	16.00 ± 0.30	12.00 ± 0.30	7.00 ± 0.30	16.90max	11.10min	7.90max	3.12	43.38	13.90	603.17	2.86
T-16-12-8	16.00 ± 0.30	12.00 ± 0.30	8.00 ± 0.30	16.90max	11.10min	8.90max	2.73	43.38	15.89	689.34	3.53
T-16.4-12-8	16.40 ± 0.30	12.00 ± 0.30	8.00 ± 0.30	17.30max	11.10min	8.90max	2.51	43.89	17.46	766.27	3.80
T-17-10.6-6.8	17.00 ± 0.30	10.60 ± 0.30	6.80 ± 0.30	17.90max	9.70min	7.70max	1.96	41.78	21.36	892.47	4.54
T-18-10-7	18.00 ± 0.30	10.00 ± 0.30	7.00 ± 0.30	18.90max	9.10min	7.90max	1.53	41.55	27.21	1130.43	6.13
T-18-10-7	18.00 ± 0.30	10.00 ± 0.30	7.00 ± 0.30	18.90max	9.10min	7.90max	1.53	41.55	27.21	1130.43	6.13
T-18-10-10	18.00 ± 0.30	10.00 ± 0.30	10.00 ± 0.30	18.90max	9.10min	10.90max	1.07	41.55	38.87	1614.89	8.77
T-18-12-6	18.00 ± 0.30	11.90 ± 0.20	6.00 ± 0.20	18.90max	11.10min	6.80max	2.58	45.86	17.76	814.21	4.16
T-19-11-5	19.00 ± 0.30	11.00 ± 0.30	5.00 ± 0.30	19.90max	10.10min	5.90max	2.30	44.86	19.51	875.14	4.43
T-19-13-6	19.00 ± 0.30	13.00 ± 0.30	6.00 ± 0.20	19.90max	12.10min	6.80max	2.76	49.08	17.79	872.9	4.39
T-19.3-10.2-10.4	19.30 ± 0.40	10.20 ± 0.30	10.40 ± 0.30	20.30max	9.30min	11.30max	0.95	43.34	45.75	1982.76	10.55



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						C1 mm <sup>-1</sup>	Ie mm	Ae mm <sup>2</sup>	Ve mm <sup>3</sup>	wt/pcs (g)
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-20-10-7	20.00 ± 0.40	10.00 ± 0.40	7.00 ± 0.30	21.00max	9.00min	7.90max	1.29	43.55	33.63	1464.72	8.05
T-20-10-10	20.00 ± 0.40	10.00 ± 0.40	10.00 ± 0.30	21.00max	9.00min	10.90max	0.91	43.55	48.05	2092.46	11.24
T-20-10-12	20.00 ± 0.40	10.00 ± 0.40	12.00 ± 0.30	21.00max	9.00min	12.90max	0.76	43.55	57.65	2510.95	13.53

T-20-11-10	20.00 ± 0.40	11.00 ± 0.40	10.00 ± 0.30	21.00max	10.00min	10.90max	1.05	45.91	43.68	2005.53	10.29
T-20-11-15	20.00 ± 0.40	11.00 ± 0.40	15.00 ± 0.30	21.00max	10.00min	15.90max	0.7	45.91	65.52	3008.29	15.23
T-20-12-8	20.00 ± 0.40	12.00 ± 0.40	8.00 ± 0.30	21.00max	11.00min	8.90max	1.54	48.14	31.31	1507.55	9.17
T-20-16-3.6	20.00 ± 0.40	16.00 ± 0.40	3.60 ± 0.25	21.00max	15.00min	4.45max	7.82	56.08	7.17	402.12	1.93
T-22-11-7	22.00 ± 0.30	11.00 ± 0.30	7.00 ± 0.30	22.90max	10.10min	7.90max	1.29	47.91	36.99	1772.31	9.74
T-22-14-6.5	22.00 ± 0.40	14.00 ± 0.40	6.50 ± 0.30	23.00max	13.00min	7.40max	2.14	54.67	25.56	1397.42	6.77
T-22-14-8	22.00 ± 0.40	14.00 ± 0.40	8.00 ± 0.30	23.00max	13.00min	8.90max	1.74	54.67	31.46	1719.90	8.61
T-22-14-10	22.00 ± 0.40	14.00 ± 0.40	10.00 ± 0.30	23.00max	13.00min	10.90max	1.39	54.67	39.33	2149.88	11.33
T-22-14-12.7	22.00 ± 0.40	14.00 ± 0.40	12.70 ± 0.30	23.00max	13.00min	13.60max	1.09	54.67	49.94	2730.34	14.04
T-22.1-13.72-6.35	22.10 ± 0.40	13.72 ± 0.40	6.35 ± 0.30	23.10max	12.72min	7.25max	2.08	54.19	26.11	1414.81	7.04
T-23-11-6	23.00 ± 0.40	11.00 ± 0.40	6.00 ± 0.30	24.00max	10.00min	6.90max	1.42	48.86	34.41	1681.17	9.40
T-23-14-7	23.00 ± 0.40	14.00 ± 0.40	7.00 ± 0.30	24.00max	13.00min	7.90max	1.81	55.8	30.86	1722.01	8.53
T-23-14-7	23.00 ± 0.40	14.00 ± 0.40	7.00 ± 0.30	24.00max	13.00min	7.90max	1.81	55.80	30.86	1722.01	8.53
T-24-18-6	24.00 ± 0.40	18.00 ± 0.40	6.00 ± 0.30	25.00max	17.00min	6.90max	3.64	65.07	17.88	1163.25	5.61
T-25-9-2.5	25.00 ± 0.40	9.00 ± 0.40	2.50 ± 0.30	26.00max	8.00min	3.40max	2.46	45.14	18.35	828.12	5.17
T-25-15-5	25.00 ± 0.40	15.00 ± 0.40	5.00 ± 0.30	26.00max	14.00min	5.90max	2.46	60.18	24.46	1472.21	7.44
T-25-15-8	25.00 ± 0.40	15.00 ± 0.40	8.00 ± 0.30	26.00max	14.00min	8.90max	1.54	60.18	39.14	2355.54	12.06
T-25-15-9	25.00 ± 0.40	15.00 ± 0.40	9.00 ± 0.30	26.00max	14.00min	9.90max	1.37	60.18	44.03	2649.98	13.63
T-25-15-10	25.00 ± 0.40	15.00 ± 0.40	10.00 ± 0.30	26.00max	14.00min	10.90max	1.23	60.18	48.93	2944.42	14.89
T-25-15-13	25.00 ± 0.40	15.00 ± 0.40	13.00 ± 0.30	26.00max	14.00min	13.90max	0.95	60.18	63.6	3827.75	19.43
T-25-15-15	25.00 ± 0.40	15.00 ± 0.40	15.00 ± 0.30	26.00max	14.00min	15.90max	0.82	60.18	73.30	4416.64	23.30
T-25.4-15.5-10	25.40 ± 0.40	15.50 ± 0.40	10.00 ± 0.30	26.40max	14.50min	10.90max	1.27	61.71	48.51	2993.1	15.71
T-26-14.5-10	26.00 ± 0.40	14.50 ± 0.30	10.00 ± 0.30	27.00max	13.60min	10.90max	1.08	60.14	55.89	3361.47	17.68
T-26.4-14.5-10.2	26.40 ± 0.40	14.50 ± 0.40	10.20 ± 0.30	27.40max	13.50min	11.10max	1.03	60.56	58.91	3567.13	18.92



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						C1 mm <sup>-1</sup>	le mm	Ae mm <sup>2</sup>	Ve mm <sup>3</sup>	wt/pcs (g)
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-28-12-12	28.00 ± 0.40	12.00 ± 0.30	12.00 ± 0.25	29.00max	11.10min	12.85max	0.62	55.90	90.46	5056.48	28.62
T-28-14-12	28.00 ± 0.60	13.80 ± 0.40	12.00 ± 0.40	29.20max	12.80min	13.00max	0.76	60.97	80.72	4921.46	26.6
T-28-16-13	28.00 ± 0.50	16.00 ± 0.40	13.00 ± 0.40	29.10max	15.00min	14.00max	0.86	65.64	76.00	4988.00	26.30
T-28-18-16	28.00 ± 0.50	18.00 ± 0.40	16.00 ± 0.40	29.10max	17.00min	17.00max	0.89	69.96	78.71	5506.49	26.57
T-29-19-7.49	29.00 ± 0.50	19.00 ± 0.35	7.49 ± 0.15	30.10max	18.05min	8.24max	1.98	73.20	36.90	2700.75	12.90

T-29-19-15.2	29.00 ± 0.50	19.00 ± 0.35	15.20 ± 0.30	30.10max	18.05min	16.00max	0.98	73.2	74.88	5480.84	27.73
T-31-19-6	31.00 ± 0.50	19.00 ± 0.50	6.00 ± 0.30	32.10max	17.90min	6.90max	2.14	75.49	35.29	2663.95	13.22
T-31-19-8	31.00 ± 0.50	19.00 ± 0.50	8.00 ± 0.30	32.10max	17.90min	8.90max	1.6	75.49	47.05	3551.93	18.12
T-31-19-12	31.00 ± 0.50	19.00 ± 0.50	12.00 ± 0.40	32.10max	17.90min	13.00max	1.07	75.49	70.58	5327.90	26.99
T-31-19-13	31.00 ± 0.50	19.00 ± 0.50	13.00 ± 0.40	32.10max	17.90min	14.00max	0.99	75.49	76.46	5771.89	29.04
T-31-19-16	31.00 ± 0.50	19.00 ± 0.50	16.00 ± 0.40	32.10max	17.90min	17.00max	0.80	75.49	94.11	7103.86	35.74
T-31-20-15	31.00 ± 0.50	20.00 ± 0.50	15.00 ± 0.50	32.10max	18.90min	16.00max	0.96	77.6	81.19	6300.71	30.72
T-31-20-15	31.00 ± 0.50	20.00 ± 0.50	15.00 ± 0.50	32.10max	18.90min	16.00max	0.96	77.60	81.19	6300.71	30.72
T-34.4-20.2-12.6	34.40 ± 0.50	20.20 ± 0.50	12.60 ± 0.40	35.50max	19.10min	13.60max	0.94	81.84	87.38	7151.28	36.92
T-34.74-5.4-1	34.74 ± 0.50	5.40 ± 0.25	1.00 ± 0.10	_	_	_	3.38	37.39	11.08	414.22	4.23
T-36-23-15	36.00 ± 0.60	23.45 ± 0.50	15.00 ± 0.40	37.20max	22.35min	16.00max	0.93	89.65	95.89	8595.89	41.37
T-36-23-22	36.00 ± 0.60	23.45 ± 0.50	22.00 ± 0.40	37.20max	22.35min	23.00max	0.67	90.58	135.96	12315.43	62.5
T-36-25-11.3	36.00 ± 0.50	25.00 ± 0.40	11.30 ± 0.30	37.10max	24.00min	12.20max	1.52	93.73	61.47	5761.05	27.3
T-36-26-10	36.00 ± 0.60	26.00 ± 0.50	10.00 ± 0.40	37.20max	24.90min	11.00max	1.93	95.69	49.56	4742.57	19.50
T-37-22-15	37.00 ± 0.60	22.00 ± 0.50	15.00 ± 0.40	38.20max	20.90min	16.00max	0.81	88.63	110	9749.34	50.51
T-38-19-13	38.10 ± 0.60	19.05 ± 0.60	13.00 ± 0.30	39.30max	17.85min	13.90max	0.70	82.75	118.67	9819.89	53.19
T-38-20.5-13.8	38.00 ± 0.50	20.50 ± 0.30	13.80 ± 0.30	39.10max	19.60min	14.80max	0.74	86.31	116.99	10097.03	52.2
T-38-22-14	38.00 ± 0.60	22.00 ± 0.60	14.00 ± 0.40	39.20max	20.80min	15.00max	0.82	89.71	109.25	9801.55	50.07
T-40-5.3-1	40.00 ± 0.80	5.30 ± 0.40	1.00 ± 0.10	41.40max	4.30min	1.70max	3.11	38.79	12.48	484.11	5.98
T-40-24-16	40.00 ± 0.80	24.00 ± 0.80	16.00 ± 0.50	41.40max	22.60min	17.10max	0.77	96.29	125.25	12060.36	61.82
T-40-25-20	40.00 ± 0.80	25.00 ± 0.80	20.00 ± 0.40	41.40max	23.60min	21.00max	0.67	98.44	147.27	14496.76	73
T-42-26-12.8	42.00 ± 0.80	26.00 ± 0.80	12.80 ± 0.40	43.40max	24.60min	13.80max	1.02	102.83	100.46	10329.98	52.07



湖南创一电子科技股份有限公司  
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						Cl	Ie	Ae	Ve	wt/pcs (g)
	A	B	C	A	B	C					
	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15					
T-47-27-15	47.00 ± 0.80	27.00 ± 0.60	15.00 ± 0.40	48.40max	25.80min	16.00max	0.76	110.49	146.22	16156.02	82.03
T-48-30-15	48.00 ± 0.80	30.00 ± 0.80	15.00 ± 0.40	49.40max	28.60min	16.00max	0.89	118.12	132.54	15656.50	79.39
T-48-32-17	48.00 ± 0.80	32.00 ± 0.90	17.00 ± 0.60	49.40max	30.50min	18.20max	0.91	122.29	134.15	16404.83	82.33
T-49.1-33.8-15.9	49.10 ± 1.00	33.80 ± 1.00	15.90 ± 0.40	50.70max	32.20min	16.90max	1.06	127.24	120.23	15298.45	76.17
T-50-30-20	50.00 ± 1.00	30.00 ± 1.00	20.00 ± 0.40	51.60max	28.40min	21.00max	0.62	120.36	195.71	23555.4	118.2
T-50-34-30	50.00 ± 0.60	34.00 ± 0.50	30.00 ± 0.40	51.20max	32.90min	31.00max	0.54	128.73	237.05	30515.55	153.50
T-51-31-20	51.00 ± 0.70	31.00 ± 0.50	20.00 ± 0.50	52.50max	29.70min	21.00max	0.63	123.63	195.92	24222.49	126.5



T-51-31-20	51.00 ± 0.70	31.00 ± 0.50	20.00 ± 0.50	52.50max	29.70min	21.00max	0.63	123.63	195.92	24222.49	126.50
T-55. 5-32. 6-18	55.50 ± 1.10	32.60 ± 1.10	18.00 ± 0.50	57.20max	30.90min	19.10max	0.66	132.07	201.31	26585.86	133.44
T-58. 3-40. 8-17. 6	58.30 ± 1.60	40.80 ± 1.00	17.60 ± 0.50	60.50max	39.20min	18.70max	1	152.41	152.38	23223.44	112.02
T-63-38-25	62.80 ± 1.60	37.60 ± 1.20	25.00 ± 0.60	65.00max	35.80min	26.20max	0.5	152.09	305.93	46528.26	240.25
T-78-50. 5-16	78.00 ± 1.50	50.50 ± 1.50	16.00 ± 0.50	80.10max	48.40min	17.10max	0.90	195.63	216.57	42366.42	213.00
T-80-40-15	80.00 ± 1.50	40.00 ± 1.30	15.00 ± 0.60	82.10max	38.10min	16.20max	0.6	174.21	288.27	50218.93	269.76
T-85-62-20	85.00 ± 1.70	62.00 ± 1.00	20.00 ± 0.80	87.30max	60.40min	21.40max	1.00	227.12	228.10	51806.37	253.41
T-85. 7-55. 5-17. 2	85.70 ± 1.50	55.50 ± 1.50	17.20 ± 0.40	87.80max	53.40min	18.20max	0.84	214.97	255.67	54961.79	206.18
T-87-56-15	87.00 ± 1.50	56.00 ± 1.50	15.00 ± 0.40	89.10max	53.90min	16.00max	0.95	217.52	228.78	49763.04	255.00
T-96-75-25	96.00 ± 1.50	75.00 ± 1.50	25.00 ± 0.40	98.10max	72.90min	26.00max	1.02	265.9	261.17	69444.66	345.07