




Type : EE Cores



规格 Type	尺寸Dimension					
	A	B	C	D	E	F
EE-5. 25-1. 95-2. 65	5.25+/-0.10	3.80MIN	1.35+/-0.10	1.95+/-0.10	2.00+/-0.10	2.65+/-0.10
EE-6. 17-1. 96-2. 85	6.17+/-0.15	3.70+/-0.10	1.35+/-0.10	1.96+/-0.10	1.93+/-0.10	2.85+/-0.10
EE-6. 50-1. 95-4. 70	6.50+/-0.10	4.85+/-0.10	1.35+/-0.10	1.95+/-0.10	3.70+/-0.10	4.70+/-0.15
EE-8. 3-3. 60-4. 10	8.30+/-0.20	6.00MIN	1.85+/-0.15	3.60+/-0.20	3.00+/-0.15	4.10+/-0.15
EE-10. 30-4. 65-5. 70	10.30+/-0.20	8.05+/-0.15	2.45+/-0.15	4.65+/-0.15	4.45+/-0.15	5.70+/-0.20
EE-13. 3-6. 15-6. 20	13.30+/-0.20	10.00MIN	2.70+/-0.20	6.15+/-0.15	4.65+/-0.15	6.20+/-0.20
EE-15. 4-3. 3-9. 10	15.40+/-0.30	11.80+/-0.30	3.40+/-0.20	3.30+0.10/-0.15	7.35+0.15/-0.10	9.10+/-0.15
EE-16. 10-4. 50-8. 10	16.10+/-0.30	11.30MIN	4.55+/-0.15	4.50+/-0.20	5.90+/-0.20	8.10+/-0.20
EE-17. 20-4. 85-12. 50	17.20+/-0.30	12.80MIN	4.00+/-0.15	4.85+/-0.20	10.30+/-0.30	12.50+/-0.30
EE-19. 00-4. 80-8. 20	19.00+/-0.40	14.30MIN	4.60+/-0.20	4.80+/-0.20	5.70+/-0.20	8.20+/-0.20
EE-20. 00-5. 70-10. 00	20.00+/-0.40	14.10MIN	5.70+/-0.20	5.70+/-0.20	7.20+/-0.20	10.00+/-0.20
EE-25. 00-7. 20-12. 55	25.00+/-0.40	17.50MIN	7.20+/-0.25	7.20+/-0.25	8.90+/-0.20	12.55+/-0.25
EE-25. 30-6. 35-9. 50	25.30+/-0.40	18.60MIN	6.30+/-0.15	6.35+/-0.15	6.35+/-0.25	9.50+/-0.25
EE-25. 40-6. 60-10. 00	25.40+/-0.40	18.50MIN	6.20+/-0.20	6.60+/-0.30	6.80+/-0.20	10.00+/-0.20

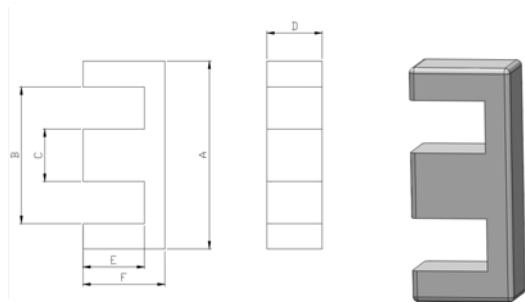


湖南创一电子科技股份有限公司
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

規格 (Type)	磁芯參數				單重 (g/set)
	C1 (mm)	Le (mm)	Ae (mm ²)	Ve (mm ³)	
EE-5.25-1.95-2.65	5.080	12.700	2.500	31.750	0.170
EE-6.17-1.96-2.85	3.700	12.200	3.300	40.260	0.250
EE-6.50-1.95-4.70	6.800	20.600	3.030	62.420	0.450
EE-8.3-3.60-4.10	2.670	19.500	7.300	142.350	0.750
EE-10.30-4.65-5.70	2.480	27.300	11.000	300.300	1.500
EE-13.3-6.15-6.20	0.580	17.900	30.800	551.320	2.800
EE-15.4-3.3-9.10	0.270	11.500	43.300	497.950	2.500
EE-16.10-4.50-8.10	1.870	37.600	20.100	755.760	4.000
EE-17.20-4.85-12.50	2.760	56.600	20.500	1160.300	5.600
EE-19.00-4.80-8.20	1.750	39.900	22.800	909.720	4.600
EE-20.00-5.70-10.00	1.450	46.400	31.900	1480.160	7.600
EE-25.00-7.20-12.55	1.110	57.600	51.800	2983.680	15.400
EE-25.30-6.35-9.50	1.190	48.000	40.400	1939.200	9.700
EE-25.40-6.60-10.00	1.230	49.800	40.400	2011.920	10.600



Type : EEL Cores

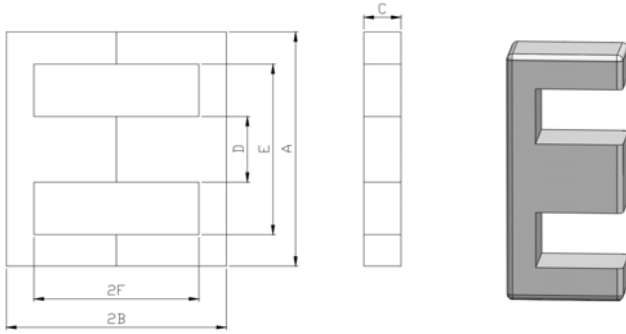

规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-4.35-1.35-1.35	4.35 ± 0.10	1.35 ± 0.05	1.35 ± 0.10	1.20 ± 0.10	3.15 ± 0.10	0.85 ± 0.05
EE-5.25-1.40-3.00	5.25 ± 0.10	3.00 ± 0.15	1.40 ± 0.10	1.35 ± 0.10	3.90 ± 0.20/-0.1	2.35 ± 0.15
EE-5.25-1.95-2.66	5.25 ± 0.10	2.66 ± 0.07	1.95 ± 0.05	1.35 ± 0.05	3.80min	1.98 ± 0.07
EE-5.25-1.90-2.65	5.25 ± 0.10	2.65 ± 0.10	1.90 ± 0.10	1.35 ± 0.10	3.80 ± 0.13	2.00 ± 0.10
EE-6.17-1.96-2.85	6.17 ± 0.13	2.85 ± 0.05	1.96 ± 0.05	1.35 ± 0.05	3.70 ± 0.10	1.93 ± 0.08/-0.07
EE-6.18-1.95-2.85	6.18 ± 0.20	2.85 ± 0.08	1.95 ± 0.10	1.35 ± 0.10	3.70 ± 0.10	1.90 ± 0.10
EE-6.30-2.00-2.82	6.30 ± 0.25	2.82 ± 0.08/-0.07	2.00 ± 0.15	1.32 ± 0.08/-0.07	3.60 ± 0.20/-0.00	1.92 ± 0.08/-0.07
EE-6.30-1.2-3.25	6.30 ± 0.10/-0.2	3.25 ± 0.15/-0.1	1.20 ± 0.10/-	1.65 ± 0.10/-0.15	4.30 ± 0.15/-0.1	2.10 ± 0.15/-0.1
EE-6.6-1.15-3.25	6.60 ± 0.15	3.25 ± 0.10	1.15 ± 0.10	1.65 ± 0.05	4.30min	2.30 ± 0.05
EE-6.75-3.00-3.25	6.75 ± 0.15	3.25 ± 0.10	3.00 ± 0.10	1.30 ± 0.10	5.20min	2.55 ± 0.10
EE-7.35-4.80-4.4	7.35 ± 0.20	4.40 ± 0.15	1.80 ± 0.15	2.45 ± 0.15	5.10min	3.10 ± 0.15
EE-8.00-5.00-5.00	8.00 ± 0.15	5.00 ± 0.08	5.00 ± 0.15	2.90 ± 0.10	5.31 ± 0.15	3.50 ± 0.08
EE-8.30-3.90-4.00	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	2.15 ± 0.15	6.30 ± 0.20	3.00 ± 0.10
EE-8.30-3.90-4.00	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	2.15 ± 0.15	6.30 ± 0.20	3.00 ± 0.10



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-8.30-1.85-4.15	8.30 ± 0.30	4.15 ± 0.10	1.85 ± 0.15	1.85 ± 0.15	6.00min	3.13 ± 0.10
EE-8.30-1.85-4.00	8.30 ± 0.30	4.00 ± 0.10	1.85 ± 0.15	1.85 ± 0.15	6.00min	3.00 ± 0.10
EE-8.30-3.90-4.00	8.30 ± 0.20	4.00 ± 0.10	3.90 ± 0.10	1.85 ± 0.15	6.15 ± 0.20	3.00 ± 0.10
EE-8.30-3.90-4.00	8.30 ± 0.20/-0.30	4.00 ± 0.20	3.90 ± 0.15	2.10 ± 0.10	6.35min	3.00 ± 0.15/-0.10
EE-8.30-3.50-5.65	8.30 ± 0.20	5.65 ± 0.15	3.50 ± 0.15	2.15 ± 0.15	6.30 ± 0.20	4.65 ± 0.10
EE-8.60-3.65-4.65	8.60 ± 0.30	4.65 ± 0.10	3.65 ± 0.15	1.85 ± 0.20	6.30min	3.55min
EE-8.70-3.90-4.05	8.70 ± 0.30	4.05 ± 0.10	3.90 ± 0.10	2.15 ± 0.10	6.80min	3.05 ± 0.10
EE-8.80-2.80-6.00	8.80 ± 0.20	6.00 ± 0.20	2.80 ± 0.10	2.80 ± 0.10	6.00 ± 0.15	4.50 ± 0.10
EE-9.00-1.90-4.00	9.00 ± 0.40	4.00 ± 0.10	1.90 ± 0.10	1.90 ± 0.10	5.20 ± 0.15	2.19 ± 0.16
EE-9.00-1.90-4.10	9.00 ± 0.40	4.10 ± 0.10	1.90 ± 0.10	1.90 ± 0.10	5.20min	2.29 ± 0.16
EE-8.80-1.50-4.20	8.80 ± 0.30	4.20 ± 0.10	1.50 ± 0.20	2.30 ± 0.10	6.40 ± 0.15	3.15 ± 0.15
EE-8.80-2.80-8.50	8.80 ± 0.20	8.50 ± 0.10	2.80 ± 0.10	2.80 ± 0.10	6.00 ± 0.15	7.20 ± 0.10
EE-9.0-2.80-6.15	9.00 ± 0.20	6.15 ± 0.20	2.80 ± 0.10	2.80 ± 0.10	6.30 ± 0.15	4.65 ± 0.10
EE-9.0-2.35-5.50	9.00 ± 0.40	5.50 ± 0.10	2.35 ± 0.15	2.35 ± 0.10	5.75min	3.75 ± 0.15
EE-9.30-2.80-6.20	9.30 ± 0.20	6.20 ± 0.15/-0.10	2.80 ± 0.10	2.80 ± 0.10	6.60 ± 0.10	4.70 ± 0.15/-0.10
EE-9.45-2.25-5.35	9.45 ± 0.20	5.35 ± 0.15	2.25 ± 0.15	3.30 ± 0.15	6.60min	3.75 ± 0.15
EE-10.20-4.75-5.70	10.20 ± 0.20	5.70 ± 0.10	4.75 ± 0.15	2.45 ± 0.15	7.70min	4.20 ± 0.15
EE-10.20-9.85-5.50	10.20 ± 0.20	5.50 ± 0.10	9.85 ± 0.15	2.40 ± 0.15	7.80 ± 0.20	4.30 ± 0.10
EE-10.00-2.70-6.60	10.00 ± 0.20	6.60 ± 0.20	2.70 ± 0.10	2.80 ± 0.10	7.30 ± 0.15	5.00 ± 0.15
EE-10.20-4.75-4.50	10.20 ± 0.20	4.50 ± 0.10	4.75 ± 0.15	2.45 ± 0.15	8.75 ± 0.20	3.25 ± 0.10
EE-10.60-4.75-4.75	10.60 ± 0.20	4.75 ± 0.15	4.75 ± 0.15	2.40 ± 0.15	8.20min	3.25 ± 0.15
EE-10.70-6.15-4.15	10.70 ± 0.20	4.15 ± 0.15	6.15 ± 0.15	2.40 ± 0.20	8.30 ± 0.20	2.90 ± 0.15/-0.10



规格 Type	磁芯参数				
	C1(mm ⁻¹)	Lc(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EE-4.35-1.35-1.35	4.71	7.04	1.49	10.49	0.11
EE-5.25-1.40-3.00	7.5	14.03	1.87	26.25	0.13
EE-5.25-1.95-2.66	4.64	12.53	2.7	33.83	0.16
EE-5.25-1.90-2.65	4.83	12.55	2.6	32.63	0.08
EE-6.17-1.96-2.85	3.71	12.29	3.31	40.7	0.24
EE-6.18-1.95-2.85	3.67	12.2	3.33	40.57	0.26
EE-6.30-2.00-2.82	3.64	12.13	3.33	40.39	0.28
EE-6.30-1.2-3.25	6.14	14.08	2.29	32.28	0.16
EE-6.6-1.15-3.25	6.74	14.63	2.17	31.75	0.07
EE-6.75-3.00-3.25	3.86	16.24	4.21	68.36	0.34
EE-7.35-4.80-4.4	4.52	18.9	4.18	79	0.38
EE-8.00-5.00-5.00	1.48	20.93	14.16	296.37	1.5
EE-8.30-3.90-4.00	2.41	19.33	7.98	154.42	0.76
EE-8.30-3.90-4.00	2.41	19.33	7.98	154.42	0.76
EE-8.30-1.85-4.15	4.53	19.95	3.67	73.22	0.36
EE-8.30-1.85-4.00	5.32	19.42	3.65	70.89	0.35
EE-8.30-3.90-4.00	2.5	19.37	7.74	149.92	0.76
EE-8.30-3.90-4.00	2.47	19.39	7.85	152.21	0.37
EE-8.30-3.50-5.65	3.61	25.92	7.19	186.3	0.93
EE-8.60-3.65-4.65	2.99	22.02	7.37	162.29	0.87



规格 Type	磁芯参数				
	C1(mm ⁻¹)	Lc(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EE-8.70-3.90-4.05	2.55	19.96	7.83	156.29	0.92
EE-8.80-2.80-6.00	3.23	25.74	7.95	204.6	1.32
EE-9.00-1.90-4.00	3.13	15.58	4.98	77.65	0.52
EE-9.00-1.90-4.10	3.34	16.42	4.91	80.7	0.54
EE-8.80-1.50-4.20	3.24	25.74	7.95	204.63	0.36
EE-8.80-2.80-8.50	4.67	36.22	7.75	280.7	1.41
EE-9.0-2.80-6.15	3.39	26.58	7.83	208.23	1.06
EE-9.0-2.35-5.50	3.42	22.71	6.64	150.77	0.82
EE-9.30-2.80-6.20	3.47	27.16	7.84	212.87	1.04
EE-9.45-2.25-5.35	3.48	23.11	6.64	153.4	0.38
EE-10.20-4.75-5.70	2.13	26	12	323	1.6
EE-10.20-9.85-5.50	1.11	26.36	23.64	623.1	3.32
EE-10.00-2.70-6.60	3.8	29.08	7.66	222.75	1.12
EE-10.20-4.75-4.50	2.18	20.39	9.34	190.44	1.24
EE-10.60-4.75-4.75	1.94	22.85	11.76	268.6	1.42
EE-10.70-6.15-4.15	1.43	21.34	14.97	319.46	0.78



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-11.00-4.50-2.60	11.00 ± 0.20	2.60 ± 0.10	4.50 ± 0.20	2.00 ± 0.20	9.00 ± 0.20	1.45 ± 0.10
EE-11.1-2.90-7.8	11.10 ± 0.20	7.80 ± 0.20	2.90 ± 0.10	3.40 ± 0.10	7.70 ± 0.20	6.00 ± 0.15
EE-12.00-6.50-3.20	12.00 ± 0.15	3.20 ± 0.10	6.50 ± 0.10	3.10 ± 0.10	8.90 ± 0.15	1.80 ± 0.10
EE-12.80-3.50-12.00	12.80 ± 0.25	12.00 ± 0.15	3.50 ± 0.13	3.65 ± 0.10	8.80 ± 0.25	10.00 ± 0.15
EE-12.95-9.8-6.50	12.95 ± 0.30	6.50 + 0.00/-0.15	9.80 ± 0.20	3.55 ± 0.15	9.15 ± 0.25	4.50 + 0.30/-0.00
EE-12.90-1.80-6.85	12.90 ± 0.30	6.85 ± 0.15	1.80 ± 0.20	6.00 ± 0.10	9.40 ± 0.25	4.50 ± 0.30
EE-13.00-6.15-6.00	13.00 ± 0.30	6.00 ± 0.20	6.15 ± 0.15	2.95 + 0.00/-0.35	10.50 ± 0.30	4.65 ± 0.15
EE-13.13-3.55-7.13	13.13 ± 0.20	7.13 ± 0.20	3.55 ± 0.10	3.53 ± 0.15	9.00min	5.11 ± 0.15
EE-13.00-6.15-4.60	13.00 ± 0.30	4.60 ± 0.20	6.15 ± 0.15	2.80 ± 0.15	10.00min	3.10 ± 0.15
EE-13.00-5.90-6.00	13.00 ± 0.40	6.60 ± 0.15	5.90 ± 0.20	2.60 ± 0.20	10.10min	5.20 ± 0.20
EE-13.00-3.00-8.10	13.00 ± 0.20	8.10 ± 0.15	3.00 ± 0.15	3.40 ± 0.15	9.40 ± 0.20	6.30 ± 0.15
EE-13.70-7.15-6.05	13.70 ± 0.30	6.05 ± 0.10	7.15 ± 0.20	3.40 ± 0.20	10.30 ± 0.30	4.75 ± 0.15
EE-14.05-3.50-15.75	14.05 ± 0.25	15.75 ± 0.15	3.50 ± 0.15	4.55 ± 0.15	9.25 ± 0.20	12.25 ± 0.15
EE-14.00-2.70-13.15	14.00 ± 0.25	13.15 + 0.15/-0.1	2.70 ± 0.15	4.00 ± 0.10	10.00 ± 0.25	10.95 ± 0.15
EE-14.15-4.20-7.70	14.15 ± 0.25	7.70 ± 0.15	4.20 ± 0.20	4.28 ± 0.15	10.55 ± 0.25	5.30 ± 0.15
EE-14.60-3.60-10.95	14.60 ± 0.30	10.95 ± 0.10	3.60 + 0.10/-0.2	4.00 ± 0.15	10.60 ± 0.30	8.95 ± 0.15
EE-15.00-2.30-7.40	15.00 ± 0.30	7.40 ± 0.20	2.30 + 0.10/-0.12	3.70 ± 0.20	9.20 ± 0.30	5.40 ± 0.20
EE-15.40-3.30-9.10	15.40 ± 0.30	9.10 ± 0.15	3.30 + 0.10/-0.15	3.40 ± 0.20	11.80 ± 0.30	7.35 + 0.15/-0.1
EE-16.00-4.80-7.30	16.00 ± 0.30	7.30 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	11.70min	5.20 ± 0.20
EE-16.00-6.80-7.15	16.00 ± 0.30	7.15 ± 0.15	6.80 ± 0.20	3.17 + 0.18/-0.17	12.50min	5.50 ± 0.10
EE-16.00-4.80-7.90	16.00 ± 0.30	7.90 ± 0.15	4.80 ± 0.15	4.00 ± 0.15	12.10 ± 0.30	5.70 ± 0.15
EE-16.00-3.80-3.60	16.00 ± 0.30	3.60 ± 0.15	3.80 ± 0.15	3.85 ± 0.15	12.00 ± 0.20	1.60 ± 0.15
EE-16.00-4.80-12.40	16.00 ± 0.30	12.40 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	11.60min	10.20 ± 0.20



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-16.40-8.00-4.90	16.40 ± 0.30	4.90 ± 0.20	8.00 ± 0.20	4.50 ± 0.15	12.20 ± 0.30	3.05 ± 0.15
EE-16.40-8.00-6.70	16.40 ± 0.30	6.70 ± 0.15	8.00 ± 0.20	4.50 ± 0.15	12.20 ± 0.30	4.50 ± 0.15
EE-16.50-7.10-6.00	16.50 ± 0.30	6.00 ± 0.10	7.10 ± 0.15	4.60 ± 0.10	11.50 ± 0.20	3.65 ± 0.10
EE-16.48-9.00-6.50	16.48 ± 0.30	6.50 +0.25/-0.3	9.00 ± 0.20	3.03 ± 0.15	9.78min	4.20 ± 0.20
EE-16.50-3.40-10.90	16.50 ± 0.25	10.90 ± 0.20	3.40 ± 0.20	4.25 ± 0.15	12.00min	8.40 ± 0.20
EE-16.70-4.70-7.30	16.70 + 0.40/-0.2	7.30 ± 0.15	4.70 ± 0.20	4.00 ± 0.20	12.50min	5.35 ± 0.15
EE-16.80-4.85-12.50	16.80 ± 0.30	12.50 ± 0.30	4.85 ± 0.20	4.00 ± 0.15	12.50min	10.30 ± 0.30
EE-16.90-7.35-8.60	16.90 ± 0.30	8.60 ± 0.20	7.35 ± 0.15	4.75 ± 0.12	11.55 ± 0.25	5.85 ± 0.15
EE-17.00-3.60-10.95	17.00 ± 0.30	10.95 + 0.20/-0.1	3.60 + 0.10/-0.2	5.10 + 0.10/-0.2	12.20 + 0.25/-0.15	8.95 + 0.15/-0.1
EE-17.00-3.55-12.85	17.00 + 0.30/-0.2	12.85 ± 0.15	3.55 + 0.10/-0.2	4.80 ± 0.15	12.20 + 0.30/-0.1	10.45 + 0.20/-0.1
EE-17.20-4.80-12.40	17.20 ± 0.25	12.40 ± 0.20	4.80 ± 0.20	4.00 ± 0.20	12.60min	10.20 ± 0.20



规格 Type	磁芯参数				
	C1(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EE-11.00-4.50-2.60	1.67	16.11	9.65	155.46	0.96
EE-11.1-2.90-7.8	3.39	33.78	9.97	336.93	1.7
EE-12.00-6.50-3.20	0.92	17.6	19.18	337.57	1.7
EE-12.80-3.50-12.00	3.81	51.2	13.43	687.8	3.38
EE-12.95-9.8-6.50	0.8	29.57	36.8	1088	5.34
EE-12.90-1.80-6.85	3.54	27.43	7.75	212.58	1.28
EE-13.00-6.15-6.00	1.64	28	17	480	2.38
EE-13.13-3.55-7.13	2.34	31.93	13.66	436.16	2.18
EE-13.00-6.15-4.60	1.37	24.33	17.68	430.12	2.18
EE-13.00-5.90-6.00	2.01	32.59	16.25	529.6	2.3
EE-13.00-3.00-8.10	3.48	36.75	10.56	387.97	1.86
EE-13.70-7.15-6.05	1.37	30.2	22	664.4	1.68
EE-14.05-3.50-15.75	3.64	62.06	17.06	1058.68	5.42
EE-14.00-2.70-13.15	5.14	56.34	10.96	617.49	3
EE-14.15-4.20-7.70	1.99	33.93	17.03	577.83	3.12
EE-14.60-3.60-10.95	3.3	48.02	14.54	698.21	3.3
EE-15.00-2.30-7.40	3.36	32.84	9.77	321.03	1.77
EE-15.40-3.30-9.10	3.75	43.27	11.54	499.23	2.48
EE-16.00-4.80-7.30	1.81	35.23	19.49	686.55	3.2
EE-16.00-6.80-7.15	1.48	35.5	24	852	3.96
EE-16.00-4.80-7.90	1.91	35.1	19.2	675	3.7
EE-16.00-3.80-3.60	1.38	20.77	15.06	312.8	1.62
EE-16.00-4.80-12.40	2.72	55	20	1116	5.28



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-16.40-8.00-4.90	0.81	26.08	32.3	842.5	4.36	
EE-16.40-8.00-6.70	0.93	32.55	34.89	1135.48	5.34	
EE-16.50-7.10-6.00	0.86	28.93	33.75	976.39	5.08	
EE-16.48-9.00-6.50	0.79	28.55	35.94	1026.09	6.86	
EE-16.50-3.40-10.90	3.18	48.56	15.27	741.51	3.56	
EE-16.70-4.70-7.30	2.22	36.78	16.58	610.22	3.4	
EE-16.80-4.85-12.50	2.84	55	19.4	1067	5.72	
EE-16.90-7.35-8.60	1.01	38.35	37.8	1449.4	7.36	
EE-17.00-3.60-10.95	3	49.82	16.63	828.51	4.4	
EE-17.00-3.55-12.85	3.33	56.74	17.04	966.85	4.78	
EE-17.20-4.80-12.40	2.77	56.24	20.28	1140.82	5.64	



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-19.10-5.00-8.15	19.10 ± 0.30	8.15 ± 0.30	5.00 ± 0.20	4.55 ± 0.15	14.20min	5.70 ± 0.20
EE-19.00-4.15-8.75	19.00 ± 0.25	8.75 ± 0.20	4.15 ± 0.15	3.20 ± 0.15	14.60 ± 0.25	6.55 ± 0.20
EE-19.00-4.80-8.30	19.00 ± 0.40	8.30 ± 0.20	4.80 ± 0.20	4.60 ± 0.20	14.30min	5.80 ± 0.20
EE-19.00-4.80-8.00	19.00 ± 0.40	8.00 ± 0.15	4.80 ± 0.20	4.80 ± 0.20	14.30 ± 0.30	5.70 ± 0.15
EE-19.55-4.85-8.05	19.55 ± 0.55	8.05 ± 0.35	4.85 ± 0.25	4.85 ± 0.25	14.80min	5.75 ± 0.25
EE-19.15-4.80-7.90	19.15 ± 0.40	7.90 ± 0.15	4.80 ± 0.20	4.65 ± 0.15	14.75 ± 0.30	5.60 ± 0.15
EE-19.10-7.90-8.10	19.10 ± 0.30	8.10 ± 0.20	7.90 ± 0.20	4.55 ± 0.15	14.20min	5.70 + 0.10/-0.2
EEL-20.00-5.00-13.70	20.00 ± 0.30	13.70 ± 0.25	5.00 + 0.05/-0.2	4.55 ± 0.20	14.30min	11.15 ± 0.15
EEL-19.40-3.55-14.25	19.40 + 0.40/-0.2	14.25 ± 0.15	3.55 + 0.10/-0.15	6.00 ± 0.15	13.40 + 0.30/-0.1	11.25 + 0.20/-0.1
EEL-20.00-5.00-13.95	20.00 ± 0.25	13.95 ± 0.25	5.00 + 0.05/-0.2	4.55 ± 0.10	14.70 ± 0.20	11.40 ± 0.15
EEL-20.00-4.90-16.00	20.00 ± 0.25	16.00 ± 0.25	4.90 + 0.15/-0.1	4.55 ± 0.10	14.70 ± 0.20	13.40 ± 0.15
EEL-19.80-10.60-5.80	19.80 ± 0.40	5.80 ± 0.20	10.60 ± 0.20	5.70 ± 0.20	14.40 ± 0.30	3.00 ± 0.20
EEL-20.00-9.95-4.00	20.00 ± 0.25	4.00 ± 0.10	9.95 ± 0.20	4.55 ± 0.15	14.70 ± 0.25	1.90 ± 0.10
EE-20.00-3.70-14.30	20.00 ± 0.25	14.30 ± 0.15	3.70 ± 0.15	6.00 ± 0.15	13.60 ± 0.25	11.30 ± 0.15
EE-20.00-5.65-11.40	20.00 ± 0.40	11.40 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	8.70 ± 0.20
EE-20.50-7.00-10.70	20.50 ± 0.30	10.70 ± 0.15	7.00 ± 0.30	6.00 ± 0.20	14.50 ± 0.30	7.00 ± 0.15
EE-22.00-5.70-9.20	22.00 ± 0.40	9.20 ± 0.20	5.70 ± 0.30	5.75 ± 0.25	16.00 ± 0.40	5.40 ± 0.20
EE-22.25-5.70-15.26	22.25 ± 0.30	15.26 ± 0.30	5.70 ± 0.30	5.70 ± 0.30	15.50min	11.20 ± 0.30
EE-22.40-4.70-22.20	22.40 ± 0.30	22.20 ± 0.30	4.70 ± 0.20	5.80 ± 0.20	16.00 ± 0.20	18.20 ± 0.20
EE-22.00-4.70-30.00	22.00 ± 0.30	30.00 ± 0.25	4.70 ± 0.20	5.80 ± 0.20	15.90 + 0.25/-0.2	26.50 ± 0.25
EE-22.40-4.70-27.00	22.40 ± 0.30	27.00 ± 0.20	4.70 ± 0.20	5.80 ± 0.20	15.80min	23.00 ± 0.20
EE-25.40-6.30-9.70	25.40 ± 0.50	9.70 ± 0.30	6.30 ± 0.20	6.35 ± 0.25	18.55min	6.65 ± 0.35
EE-25.40-6.35-15.90	25.40 ± 0.40	15.90 ± 0.25	6.35 ± 0.25	6.35 ± 0.30	18.80min	12.70 ± 0.30
EE-25.10-4.75-14.75	25.10 ± 0.25	14.75 ± 0.20	4.75 ± 0.20	8.40 ± 0.20	17.10 ± 0.20	10.85 ± 0.15



规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EE-25.20-4.00-16.50	25.20 ± 0.25	16.50 ± 0.20	4.00 ± 0.20	8.40 ± 0.20	17.20 ± 0.20	12.55 + 0.20/-0.15
EE-25.20-4.00-19.00	25.20 ± 0.30	19.00 ± 0.20	4.00 ± 0.20	8.40 ± 0.20	17.00min	15.00 ± 0.25
EE-28.40-11.50-20.40	28.40 ± 0.40	20.40 ± 0.20	11.50 ± 0.20	8.00 ± 0.20	20.00min	16.40 ± 0.20
EE-30.20-4.00-18.85	30.20 ± 0.25	18.85 ± 0.20	4.00 ± 0.20	11.25 ± 0.20	19.20 ± 0.20	13.35 + 0.20/-0.15
EE-30.00-7.05-16.80	30.00 + 0.80/-0.6	16.80 ± 0.20	7.05 ± 0.20	6.95 ± 0.20	19.90 ± 0.40	11.30 ± 0.20
EE-30.10-7.05-15.00	30.10 ± 0.70	15.00 ± 0.20	7.05 ± 0.25	6.95 ± 0.25	19.90 ± 0.40	10.00 ± 0.30
EE-30.25-10.70-13.45	30.25 ± 0.75	13.45 ± 0.20	10.70 ± 0.30	10.70 ± 0.30	19.90min	8.00min
EE-34.32-9.27-14.12	34.32 ± 0.61	14.12 ± 0.15	9.27 ± 0.25	9.32 ± 0.20	25.53min	9.78 ± 0.13
EE-36.15-11.25-17.8	36.15 ± 0.85	17.80 ± 0.20	11.25 ± 0.25	9.95 ± 0.25	24.50min	12.00min
EE-39.50-13.5-6.85	39.50 ± 0.80	6.85 ± 0.10	13.50 ± 0.30	4.70 ± 0.30	34.40min	4.15 + 0.15/ 0.1
EE-40.40-8.00-30.95	40.40 ± 0.60	30.95 ± 0.25	8.00 ± 0.20	11.20 ± 0.25	29.20 ± 0.50	22.95 ± 0.25
EE-42.0-13.50-6.48	42.00 ± 0.50	6.48 ± 0.15	13.50 ± 0.30	4.80 ± 0.20	37.00min	4.10 ± 0.15
EE-42.15-14.85-21.2	42.15 ± 0.85	21.20 ± 0.40	14.85 ± 0.30	11.85 ± 0.35	29.50mm	15.10 ± 0.30
EE-65.00-26.90-32.50	65.00 + 1.50/-1.2	32.50 ± 0.30	26.90 ± 0.50	19.65 ± 0.35	45.10 ± 0.90	22.60 ± 0.40
EE-70.50-31.60-33.20	70.50 ± 1.00	33.20 ± 0.20	31.60 ± 0.60	21.65 ± 0.50	48.00 + 1.50/-0.0	22.40 ± 0.40




规格 Type	磁芯参数				
	C1(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EE-19.10-5.00-8.15	1.67	40	23	954	4.52
EE-19.00-4.15-8.75	2.7	43.06	15.91	685.13	3.64
EE-19.00-4.80-8.30	1.84	40.6	22.1	897.26	4.52
EE-19.00-4.80-8.00	1.76	39.63	22.55	893.73	4.86
EE-19.55-4.85-8.05	1.76	40.31	22.93	924.63	4.46
EE-19.15-4.80-7.90	1.82	39.65	21.79	863.97	4.36
EE-19.10-7.90-8.10	1.11	40	36	1507	7.1
EEL-20.00-5.00-13.70	2.46	61	25	1553	7.4
EEL-19.40-3.55-14.25	2.9	61.82	21.3	1316.87	6.3
EEL-20.00-5.00-13.95	2.57	63.33	24.59	1557.28	7.5
EEL-20.00-4.90-16.00	2.95	71.34	24.16	1723.57	8.82
EEL-19.80-10.60-5.80	0.5	29.45	59.02	1738.07	9.02
EEL-20.00-9.95-4.00	0.56	24.77	44.48	1101.67	7.26
EE-20.00-3.70-14.30	2.74	62.32	22.75	1417.78	7.16
EE-20.00-5.65-11.40	1.64	52.09	31.76	1654.36	8.4
EE-20.50-7.00-10.70	1.06	46.73	44.29	2069.5	12.3



规格 Type	磁芯参数				
	Cl(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EE-22.00-5.70-9.20	0.97	41.96	36.26	1610	7.8
EE-22.25-5.70-15.26	1.77	65	37	2405	11.74
EE-22.40-4.70-22.20	3.15	93.21	29.58	2757.1	13.66
EE-22.00-4.70-30.00	4.43	125.94	28.4	3576.94	17.36
EE-22.40-4.70-27.00	3.86	112.47	29.12	3275.13	16.3
EE-25.40-6.30-9.70	1.21	48	40	1962	9.36
EE-25.40-6.35-15.90	1.79	73	40	3005	14.5
EE-25.10-4.75-14.75	1.68	64.61	38.45	2484.25	8.7
EE-25.20-4.00-16.50	2.2	71.6	32.51	2327.6	11.48
EE-25.20-4.00-19.00	2.5	81.48	32.62	2657.72	13.32
EE-28.40-11.50-20.40	0.96	90.3	93.7	8462	40.8
EE-30.20-4.00-18.85	1.77	78.72	44.39	3494.4	17.7
EE-30.00-7.05-16.80	1.17	70.8	60.59	4290	24.2
EE-30.10-7.05-15.00	1.07	64.86	60.46	3921.66	21.16
EE-30.25-10.70-13.45	0.51	58	113.76	6598.02	34.1
EE-34.32-9.27-14.12	0.84	69.2	82.64	5719.22	28.78
EE-36.15-11.25-17.8	0.71	81.72	115.51	9441.04	48.4
EE-39.50-13.5-6.85	0.78	54.24	69.98	3795.72	16.4
EE-40.40-8.00-30.95	1.36	129.29	94.96	12277.38	64.3
EE-42.0-13.50-6.48	0.87	56.17	64.9	3645.43	17.26
EE-42.15-14.85-21.2	0.54	97.6	178	17400	89.4
EE-65.00-26.90-32.50	0.28	146.93	532.11	78182.92	374
EE-70.50-31.60-33.20	0.22	149.9	674.6	101106	517

Type : EF Cores

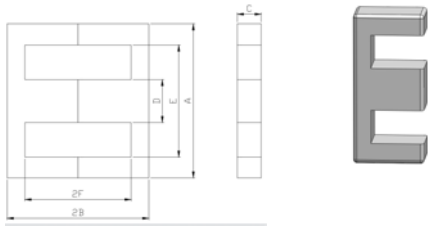

规格 Type	尺寸Dimensions (mm)					
	A	B	C	D	E	F
EF-10.0-2.75-5.00	10.00 ± 0.30	5.00 ± 0.10	2.75 ± 0.15	2.88 ± 0.15	7.25 ± 0.25	3.63 ± 0.15
EF-12.00-3.60-7.40	12.00 + 0.20/-0.3	7.40 ± 0.10	3.60 ± 0.20	3.60 ± 0.15	8.80min	5.35 ± 0.15
EF-12.60-3.60-6.40	12.60 + 0.5/-0.40	6.40 ± 0.10	3.60 ± 0.20	3.65 ± 0.15	8.80min	4.65 ± 0.15
EF-12.60-3.55-6.90	12.60 ± 0.40	6.90 ± 0.20	3.55 ± 0.15	3.50 ± 0.30	9.20 ± 0.30	4.90 ± 0.20
EF-12.65-3.55-6.40	12.65 ± 0.45	6.40 ± 0.10	3.55 ± 0.15	3.55 ± 0.15	8.90min	4.65 ± 0.15
EF-12.60-3.55-7.40	12.60 + 0.50/-0.4	7.40 ± 0.10	3.55 ± 0.15	3.65 ± 0.15	8.90min	5.65 ± 0.15
EF-12.80-4.90-10.00	12.80 ± 0.30	10.00 ± 0.20	4.90 ± 0.20	3.70 ± 0.20	8.90min	8.30 ± 0.20
EF-12.90-3.60-6.50	12.90 ± 0.25	6.50 ± 0.15	3.60 ± 0.15	3.60 ± 0.15	9.60 ± 0.20	4.65 ± 0.15
EF-13.40-3.60-7.45	13.40 ± 0.35	7.45 ± 0.20	3.60 ± 0.15	3.60 ± 0.15	9.50 ± 0.25	5.35 ± 0.15
EF-13.50-6.00-6.75	13.50 ± 0.30	6.75 ± 0.15	6.00 + 0.15/-0.2	2.85 ± 0.15	10.50 ± 0.25	5.25 ± 0.20
EF-16.10-4.50-8.05	16.10 ± 0.60	8.05 ± 0.15	4.50 ± 0.20	4.55 ± 0.15	11.30min	5.90 ± 0.20
EF-16.00-4.35-7.95	16.00 ± 0.30	7.95 ± 0.15	4.35 ± 0.15	4.35 ± 0.15	11.40min	5.80 ± 0.15
EF-16.00-4.50-8.05	16.00 + 0.70/-0.5	8.05 ± 0.15	4.50 ± 0.20	4.55 ± 0.15	11.80min	5.90 ± 0.20
EF-16.20-3.45-9.50	16.20 ± 0.40	9.50 ± 0.15	3.45 ± 0.15	4.60 ± 0.15	11.30min	7.25 ± 0.20
EF-16.20-4.50-8.35	16.20 ± 0.40	8.35 ± 0.15	4.50 ± 0.15	4.50 ± 0.15	11.70min	6.20 ± 0.20
EF-17.00-4.70-8.20	17.00 + 0.70/-0.5	8.20 + 0.00/-0.3	4.70 + 0.00/-0.4	4.70 + 0.00/-0.3	12.30 + 0.60/-0	5.70 + 0.40/-0
EF-20.00-5.65-9.90	20.00 ± 0.40	9.90 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.10min	7.20 ± 0.20
EF-20.00-5.70-10.60	20.00 ± 0.40	10.60 ± 0.15	5.70 ± 0.20	5.70 ± 0.20	14.40 ± 0.30	7.60 ± 0.15
EF-20.00-10.75-10.15	20.00 ± 0.40	10.15 ± 0.15	10.75 ± 0.25	5.70 ± 0.20	14.10min	7.45 ± 0.20
EF-20.40-5.65-9.90	20.40 ± 0.40	9.90 ± 0.20	5.65 ± 0.25	5.70 ± 0.20	14.60min	7.20 ± 0.20
EF-24.0-5.75-12.0	24.00 ± 0.60	12.00 ± 0.35	5.75 ± 0.25	5.80 ± 0.20	16.30 ± 0.40	8.25 ± 0.25
EF-25.05-7.20-12.55	25.05 ± 0.75	12.55 ± 0.25	7.20 ± 0.30	7.25 ± 0.25	17.50min	8.95 ± 0.25
EF-25.05-8.85-12.80	25.05 ± 0.75	12.80 ± 0.25	8.85 ± 0.25	7.25 ± 0.25	17.50min	8.95min

规格 Type	磁芯参数				
	Cl(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)
EF-10.0-2.75-5.00	3.02	23.23	7.68	178.41	0.9
EF-12.00-3.60-7.40	2.64	32.15	12.18	391.59	2.06
EF-12.60-3.60-6.40	2.39	29.6	12.4	367	1.88
EF-12.60-3.55-6.90	2.44	31.05	12.7	394.3	2.06
EF-12.65-3.55-6.40	2.41	29.77	12.35	367.66	1.76
EF-12.60-3.55-7.40	2.6	33.47	12.89	431.43	2.06
EF-12.80-4.90-10.00	2.42	43.97	18.19	799.76	3.94
EF-12.90-3.60-6.50	2.38	30.15	12.63	380.79	1.88
EF-13.40-3.60-7.45	2.41	33.44	13.85	463.21	2.28
EF-13.50-6.00-6.75	1.88	33.28	17.67	588.06	2.86
EF-16.10-4.50-8.05	1.87	37.6	20.1	754	3.7
EF-16.00-4.35-7.95	1.93	37.11	19.22	713.25	3.62
EF-16.00-4.50-8.05	2.01	37.69	18.74	706.49	3.7
EF-16.20-3.45-9.50	2.71	43.08	15.91	685.3	4.52
EF-16.20-4.50-8.35	1.95	38.8	19.9	772	3.92
EF-17.00-4.70-8.20	1.87	38.34	20.48	785.2	3.9
EF-20.00-5.65-9.90	1.34	44.9	33.5	1500	7.3
EF-20.00-5.70-10.60	1.47	48.22	32.71	1577.54	7.98
EF-20.00-10.75-10.15	0.79	47.16	59.95	2827.3	14
EF-20.40-5.65-9.90	1.49	46.62	31.28	1458.6	7.46
EF-24.0-5.75-12.0	1.38	53.82	38.88	2092.52	11
EF-25.05-7.20-12.55	1.09	57.5	52.84	3038.3	14.68
EF-25.05-8.85-12.80	0.87	57.87	66.16	3829.3	19.44