









Type : UU Cores



规格 Type	尺寸Dimensions (mm)						图号 Fig.
	A	B	C	E	F	H	
UU-4.60-3.60-6.05	4.60 ± 0.20	6.05 ± 0.10	3.60 ± 0.10	2.40min	4.65 ± 0.15		1
UU-4.70-2.40-1.90	4.70 ± 0.10	1.90 ± 0.10	2.40 ± 0.10	3.00min	1.20 ± 0.10		1
UU-5.20-2.85-7.45	5.20 + 0.10/-0.2	7.40 ± 0.15	2.85 ± 0.10	2.25 ± 0.15	5.85 ± 0.15		1
UU-8.50-3.60-4.70	8.50 ± 0.20	4.70 ± 0.15	3.60 ± 0.15	3.50 ± 0.15	2.40 ± 0.15		1
UU-8.50-10.00-3.50	8.50 ± 0.15	3.50 ± 0.10	10.00 ± 0.15	4.00 ± 0.15	1.00 ± 0.10		1
UU-9.50-3.90-6.80	9.50 ± 0.20	6.80 ± 0.20	3.90 ± 0.10	3.50 ± 0.20	3.50 ± 0.20		1
UU-9.80-2.70-7.20	9.80 ± 0.20	7.20 ± 0.10	2.70 ± 0.20	4.20min	4.20 ± 0.20		1
UU-9.80-3.40-9.00	9.80 ± 0.30	9.00 ± 0.20	3.40 ± 0.20	3.65min	6.00 ± 0.20		1
UU-10.00-6.00-5.00	10.00 + 0.30/-0.2	5.00 + 0.00/-0.2	6.00 ± 0.20	4.50min	2.40 ± 0.10		1
UU-10.50-5.00-8.00	10.50 ± 0.25	8.00 ± 0.30	5.00 ± 0.15	5.35min	5.30 ± 0.30		1
UU-11.00-5.45-8.10	11.00 + 0.00/-0.6	8.10 + 0.10/-0.2	5.45 ± 0.20	5.50 ± 0.20	5.80 + 0.2/-0.1		1
UU-11.15-7.40-14.05	11.15 ± 0.25	14.05 ± 0.10	7.40 ± 0.20	4.55 ± 0.25	10.80 ± 0.15		1

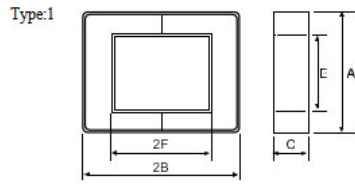

湖南创一电子科技股份有限公司
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)						图号 Fig.
	A	B	C	E	F	H	
UU-12.00-4.45-7.90	12.00 ± 0.30	7.90 ± 0.10	4.45 ± 0.15	7.20min	5.65 ± 0.10		1
UU-13.50-3.55-10.50	13.50 ± 0.25	10.50 ± 0.10	3.55 ± 0.20	4.15 ± 0.15	7.90 ± 0.10		2
UU-14.0-3.40-30.6	14.00 ± 0.30	30.60 ± 0.20	3.40 ± 0.25	5.00 ± 0.30	23.60 ± 0.20		4
UU-15.20-6.45-11.40	15.20 ± 0.70	11.40 ± 0.50	6.45 ± 0.25	5.20min	6.25 ± 0.35		1
UU-15.10-3.20-30.65	15.10 ± 0.30	30.65 ± 0.20	3.20 ± 0.20	6.10 ± 0.25	24.65 ± 0.20		4
UU-15.10-3.20-32.00	15.10 ± 0.30	32.00 ± 0.20	3.20 ± 0.25	6.10 ± 0.30	26.00 ± 0.20		1
UU-16.00-6.00-10.00	16.00 ± 0.30	10.00 ± 0.20	6.00 ± 0.15	6.70min	6.00 ± 0.15		1
UU-16.50-3.70-29.9	16.50 ± 0.30	29.90 ± 0.20	3.70 ± 0.15	5.50 ± 0.25	23.90 ± 0.20		3
UU-16.50-3.70-22.65	16.50 ± 0.30	22.65 ± 0.20	3.70 ± 0.20	5.50 ± 0.25	16.65 ± 0.20		3
UU-16.60-4.00-29.3	16.60 ± 0.30	29.30 ± 0.30	4.00 ± 0.20	5.60 ± 0.20	24.30 ± 0.20		4
UU-17.80-3.30-35.5	17.80 ± 0.30	35.50 ± 0.20	3.30 ± 0.20	5.80 ± 0.25	29.50 ± 0.20		4
UU-17.80-3.30-36.20	17.80 ± 0.30	36.20 ± 0.20	3.30 ± 0.20	5.80 ± 0.25	30.20 ± 0.20		1
UU-18.0-8.00-10.50	18.00 ± 0.30	10.50 ± 0.15	8.00 ± 0.20	7.00 ± 0.20	6.50 ± 0.15		2
UU-18.20-3.50-31.20	18.20 ± 0.40	31.20 ± 0.20	3.50 ± 0.20	6.20 ± 0.25	25.20 ± 0.20		4
UU-18.50-5.70-36.90	18.50 ± 0.30	36.90 ± 0.20	5.70 ± 0.18	6.50 ± 0.25	30.90 ± 0.20		1
UU-19.05-2.00-17.00	19.05 ± 0.35	17.00 ± 0.15	2.00 ± 0.10	4.35 ± 0.10	11.60 ± 0.15		2
UU-19.40-4.50-11.00	19.40 ± 0.30	11.00 ± 0.20	4.50 ± 0.20	6.60 ± 0.30	8.00 ± 0.20	6.40 ± 0.20	5
UU-19.60-5.00-18.30	19.60 ± 0.30	18.30 ± 0.20	5.00 ± 0.15	10.60 ± 0.30	13.30 ± 0.20		1
UU-19.60-3.80-37.60	19.60 ± 0.40	37.60 ± 0.20	3.80 ± 0.20	5.00 ± 0.25	29.80 ± 0.20		4
UU-19.60-3.80-38.00	19.60 ± 0.30	38.00 ± 0.20	3.80 ± 0.20	5.00 ± 0.25	30.20 ± 0.20		1
UU-22.00-10.00-15.00	22.00 ± 0.30	15.00 ± 0.25	10.00 ± 0.30	12.00min	10.00 ± 0.25		1
UU-24.00-3.60-21.60	24.00 ± 0.35	21.60 ± 0.20	3.60 ± 0.20	5.00 ± 0.20	13.60 ± 0.20		4
UU-32.50-12.50-27.75	32.50 ± 0.50	27.75 ± 0.25	12.50 ± 0.20	13.50 ± 0.20	18.20 ± 0.20		1



规格 Type	磁芯参数					图号 Fig.
	C1(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)	
UU-4.60-3.60-6.05	6.74	26.94	4	107.8	0.56	1
UU-4.70-2.40-1.90	7.52	13.31	1.77	23.56	0.12	1
UU-5.20-2.85-7.45	4.69	32.64	4.25	138.6	0.7	1
UU-8.50-3.60-4.70	2.78	24.11	8.66	208.77	1.12	1
UU-8.50-10.00-3.50	0.81	19.43	23.93	465	2.48	1
UU-9.50-3.90-6.80	2.54	30.85	12.11	373.87	1.96	1
UU-9.80-2.70-7.20	4.3	34	8	271	1.26	1
UU-9.80-3.40-9.00	4.05	41.09	10.14	416.62	2.22	1
UU-10.00-6.00-5.00	1.68	26.99	16.04	432.97	2.24	1
UU-10.50-5.00-8.00	3.14	40	13	518	2.52	1
UU-11.00-5.45-8.10	3	41.88	13.95	584.26	2.92	1
UU-11.15-7.40-14.05	2.57	62.58	24.33	1523	7.76	1
UU-12.00-4.45-7.90	4.39	44.54	10.14	451.63	2.24	1
UU-13.50-3.55-10.50	6.78	89.15	13.14	636.83	3.72	2
UU-14.0-3.40-30.6	7.51	120.6	16.05	1935.54	10.14	4
UU-15.20-6.45-11.40	1.58	51	33	1673	8.16	1
UU-15.10-3.20-30.65	8.46	126.35	14.93	1886.41	9.6	4
UU-15.10-3.20-32.00	8.84	131.74	14.9	1963.54	10	1
UU-16.00-6.00-10.00	1.93	52	27	1381	6.56	1
UU-16.50-3.70-29.9	6.04	124.57	20.62	2568.33	13	3
UU-16.50-3.70-22.65	4.62	95.58	20.7	1978.59	10.22	3
UU-16.60-4.00-29.3	5.76	124.78	21.65	2701.31	13.5	4
UU-17.80-3.30-35.5	7.79	142.71	18.32	2614.45	14.6	4



规格 Type	磁芯参数					图号 Fig.
	C1(mm ⁻¹)	Le(mm)	Ae (mm ²)	Ve(mm ³)	Wt(g/set)	
UU-17.80-3.30-36.20	7.64	151.25	19.8	2994.77	14.86	1
UU-18.0-8.00-10.50	1.42	53.9	37.9	2047	11	2
UU-18.20-3.50-31.20	6.29	132.05	21	2773.05	13.84	4
UU-18.50-5.70-36.90	4.55	155.45	34.2	5316.39	26.36	1
UU-19.05-2.00-17.00	5.47	70.6	12.9	910.74	7.3	2
UU-19.40-4.50-11.00	2.79	53.93	19.35	1043.55	6.98	5
UU-19.60-5.00-18.30	3.84	89.15	23.21	2069.17	10.15	1
UU-19.60-3.80-37.60	5.46	152.87	27.99	4278.83	22	4
UU-19.60-3.80-38.00	5.52	154.47	27.99	4323.62	21.66	1
UU-22.00-10.00-15.00	1.63	80.06	49.09	3929.91	19.4	1
UU-24.00-3.60-21.60	2.81	91.56	32.58	2982.94	15.2	4
UU-32.50-12.50-27.75	1.11	129.31	116.8	15103.41	82.26	1